


Belden Classic 300% Ground Foil/Braid Design VFD Cable

Part No.	AWG	Cond. Stranding	Standard Lengths*		Standard Unit Wt.		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
			Ft.	m	Lbs.	kg	Inch	mm	Lbs.	N	Inch	mm
29500**	16	26 x 30	1000††	304.8	185	83.9	0.53	13.46	128	570	4.3	109.2
29501	14	41 x 30	1000††	304.8	235	106.6	0.60	15.24	212	943	4.8	121.9
29502	12	65 x 30	1000††	304.8	298	135.2	0.65	16.51	336	1495	5.2	132.0
29503	10	105 x 30	1000††	304.8	396	179.6	0.69	17.53	592	2634	5.5	139.7
29504	8	7 x 19 x 29	1000††	304.8	680	308.4	0.93	23.62	768	3418	7.5	190.5
29505	6	7 x 19 x 27	1000††	304.8	906	411.3	1.02	25.91	1220	5429	8.2	203.2
29506	4	7 x 19 x 25	1000††	304.8	1227	556.6	1.16	29.46	1940	8633	9.3	236.2
29507	2	7 x 19 x 23	1000††	304.8	1766	801.0	1.31	33.27	3088	13742	10.8	273.1

††Final put-up may vary ±10% from length shown.

*Numerous put-up options available

**600V Only

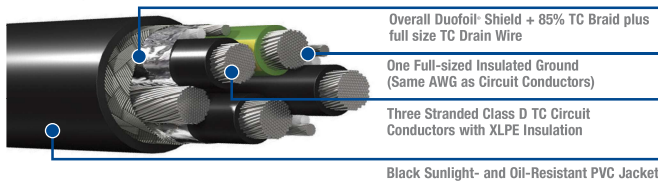

- 1000V UL Flexible Motor Supply
- 600V/1000V UL 1277 Type TC-ER
- 1000V UL 2277 Type WTTC
- 1000V CSA AWM I/II A/B FT4
- IEEE 1202
- UL Direct Burial
- XHHW-2, RHW-2 rated circuit conductors -14 AWG and larger


- 90°C Wet/Dry
- Suitable for Class I, II & III, Division 2 hazardous locations
- MSHA
- UL 1685 Vertical Tray Flame Test
- RoHS compliant
- CE approved
- C(UL) 600V Type CIC TC

Belden Classic 100% Ground Symmetrical Design VFD Cable, Large AWG

Part No.	AWG	Cond. Stranding	Standard Lengths*		Standard Unit Wt.		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
			Ft.	m	Lbs.	kg	Inch	mm	Lbs.	N	Inch	mm
29528	1	7 x 19 x 22	1000†	304.8	1610	730.3	1.20	30.48	2650	11788	12.0	304.8
29529	1/0	7 x 19 x 21	1000†	304.8	2013	913.1	1.29	32.77	3537	15733	12.9	327.7
29530	2/0	7 x 19 x 20	1000†	304.8	2318	1051.4	1.40	35.56	4200	18682	14.0	355.6
29531	3/0	7 x 19 x 19	1000†	304.8	2708	1229.4	1.52	38.61	5025	22352	15.2	386.1
29532	4/0	7 x 19 x 18	500†	152.4	1717	778.8	1.68	42.67	6670	29670	16.8	426.7

†Final put-up may vary ± 5% from length shown.

*Numerous put-up options available

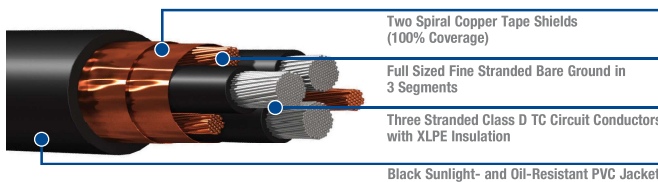

- 1000V UL Flexible Motor Supply
- 600V/1000V UL 1277 Type TC-ER
- 1000V UL 2277 Type WTTC
- 1000V CSA AWM I/II A/B FT4
- IEEE 1202
- UL Direct Burial
- XHHW-2 rated circuit conductors

- 90°C Wet/Dry
- Suitable for Class I, II & III, Division 2 hazardous locations
- MSHA
- UL 1685 Vertical Tray Flame Test
- RoHS compliant
- CE approved
- C(UL) 600V Type RW90 TC