Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

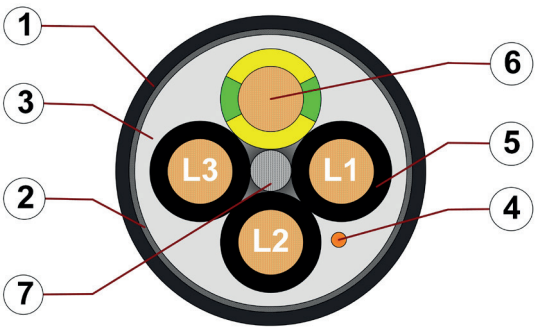

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Inner jacket: Pressure extruded, gusset-filling TPE mixture
4. CFRIP: Tear strip for faster cable stripping
5. Core insulation: Mechanically high-quality, especially low-capacitance XLPE mixture
6. Conductor: Especially bending-stable version consisting of bare copper wires
7. Strain relief: Tensile stress-resistant centre element

Example image
For detailed overview please see design table

Cable structure

Conductor	**Cores < 10 mm²:** Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228). **Cores ≥ 10 mm²:** Conductor cable consisting of pre-leads (following DIN EN 60228).
Core insulation	Mechanically high-quality, especially low-capacitance XLPE mixture.
Core structure	Cores wound with a short pitch length around a high tensile strength centre element.
Core identification	Black cores with white numbers, one green-yellow core. 1. Core: U / L1 / C / L+ 2. Core: V / L2 3. Core: W / L3 / D / L-
Inner jacket	TPE mixture adapted to suit the requirements in e-chains®.
Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70 % linear, approx. 90 % optical
Outer jacket	Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®. Colour: Signal black (similar to RAL 9004) Printing: white
CFRIP®	Strip cables faster: a tear strip is moulded into the inner jacket Video ▶ www.igus.eu/CFRIP

„00000 m“* igus chainflex CF35.UL.--.--① ----② 600/1000V E310776

cЯUus AWM Style ③ VW-1 AWM I/II A/B 90°C 1000V FT1 DNV-GL TAE00003X9

EAC/CTP CE RoHS-II conform www.igus.de +++ chainflex cable works +++

*** Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
③ Printing of the UL style (see related chapter).
Example: ... chainflex **CF35.UL.15.04 (4G1.5)C 600/1000V** ...

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

Dynamic information

Bend radius	e-chain® linear	minimum 7.5 x d
	flexible	minimum 6 x d
	fixed	minimum 4 x d
Temperature	e-chain® linear	-35 °C up to +90 °C
	flexible	-45 °C up to +90 °C (following DIN EN 60811-504)
	fixed	-50 °C up to +90 °C (following DIN EN 50305)
v max.	unsupported	10 m/s
	gliding	6 m/s
a max.		80 m/s²
Travel distance		Unsupported travel distances and up to 400 m for gliding applications, Class 6

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [x d]	R min. [x d]	R min. [x d]
-35/-25	10	11	12
-25/+80	7.5	8.5	9.5
+80/+90	10	11	12

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

Nominal voltage	600/1000 V (following DIN VDE 0298-3) 1000 V (following UL)
Testing voltage	4000 V (following DIN EN 50395)

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

Properties and approvals

UV resistance	High
Oil resistance	Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
Flame retardant	According to IEC 60332-1-2, FT1, VW-1
Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
PFAS-free	Use of PFAS-free materials according to the content of the REACH directive and its rules for the production and processing of chemical substances
UL verified	Certificate No. V293560: „igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
UL/CSA AWM	See data sheet for details ▶ www.igus.eu/CF35.UL
NFPA	Following NFPA 79-2018, chapter 12.9
DNV-GL	Type approval certificate No. TAE00003X9
REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF34. UL.25.04.D - tested by IPA according to standard DIN EN ISO 14644-1
CE	Following 2014/35/EU

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.5	4	30052	22022	1000	90
0.75	4	30052	22022	1000	90
1.5	4	30052	22022	1000	90
2.5	4	30052	22021	1000	90
4	4	30052	22021	1000	90
6	3-4	30052	22021	1000	90
10	4	30052	22021	1000	90
16	4	30052	22021	1000	90
25	3-4	30052	22021	1000	90

Typical lab test setup for this cable series

Test bend radius R	approx. 55 - 250 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s²

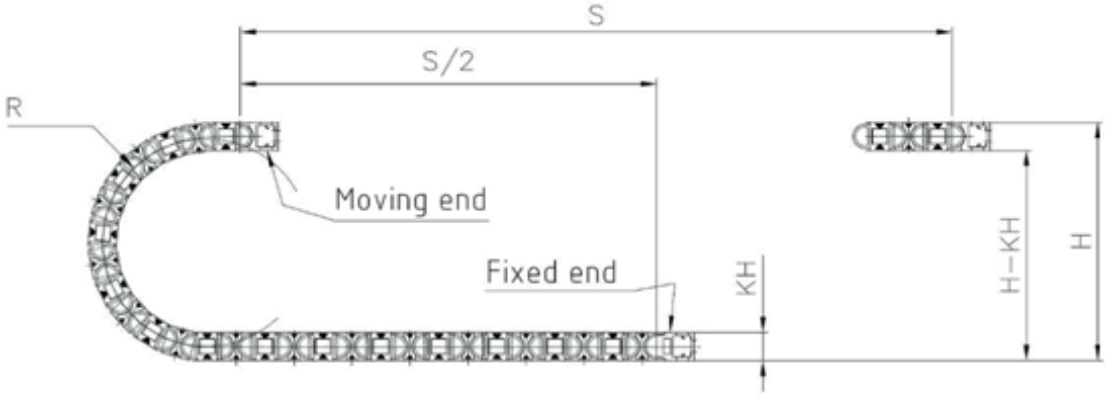

Typical application areas

- For extremely heavy duty applications, Class 6
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- No torsion, Class 1
- Indoor and outdoor applications, UV-resistant
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, outdoor cranes, low temperature applications

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF35.UL.05.04	(4G0.5)C	7.5	42	79
CF35.UL.07.04	(4G0.75)C	8.0	58	90
CF35.UL.15.04	(4G1.5)C	10.0	89	146
CF35.UL.25.04	(4G2.5)C	11.5	133	207
CF35.UL.40.04	(4G4.0)C	13.0	203	290
CF35.UL.60.04	(4G6.0)C	16.0	288	423
CF35.UL.100.04	(4G10)C	18.5	468	632
CF35.UL.160.04	(4G16)C	23.0	738	974
CF35.UL.250.04	(4G25)C	27.5	1153	1481
CF35.UL.60.03.O.PE [11)]	(3x6.0)C	14.5	229	344
CF35.UL.250.03.O.PE [11)]	(3x25)C	24.5	880	1163

[11)] Phase-out model

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core **x =** without earth core

Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
0.5	39	11
0.75	26	14
1.5	13.3	21
2.5	7.98	30
4	4.95	41
6	3.3	53
10	1.91	74
16	1.21	99
25	0.78	131

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet
chainflex® CF35.UL

Motor cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

Example image

Design table

Part No.	Number of cores	Core design
CF35.UL.XX.03.O.PE	3	
CF35.UL.XX.04	4	

Guarantee igus chainflex 4 YEARS up to 4 years guarantee

igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

CFRIP

DESIGN AWARD 2016

c UL us LISTED

c UL us

nec NFPA

NFPA

CLP A

TYPE APPROVED PRODUCT DNV DNVGL.COM/AF

REACH

RoHS

clean-room

DESINA

CE

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.